

Technical Sheet

Training Floor

Description

Sports flooring.

Commercial name

Training Gomma 100x100 cm th. 15mm.

Size and weight

Size: 100 x 100 cm (material tolerances 1%)

Thickness: 15 mm (material tolerances 5%)

Weight: 14 Kg.

Color

Black, red, green, blue, grey, brown.

Production technology

Tile made by hot molding recycled rubber granules, mono-component polyurethane binder and additives.


The recycled rubber granules have a grain size between 0 and 2.5 mm in diameter and make the paving slab draining.

The slab is provided with 5 x 5 mm sloping bevels along the entire perimeter that recreate the tile effect.

The density of the product is approximately 0.9 Kg / dm³.

Both surfaces of the slab can be made with a smooth, rhomboid or customized finish.

Weather resistant product.

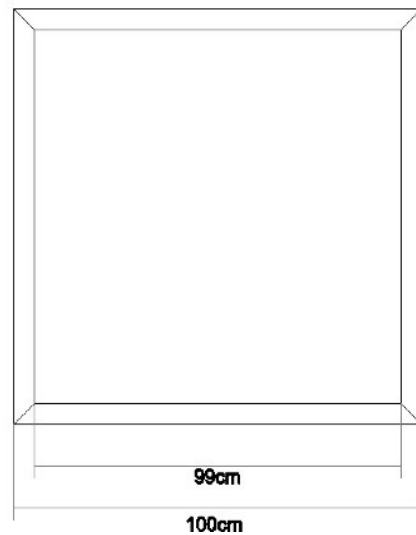

Applications

It can be used to pave fitness areas, multifunctional spaces, CrossFit box, weight room and sports areas.

Product





Elastrade s.r.l.

Sede Operativa e Amministrativa: Via dei Termini, 20 I-24040 Osio Sopra (BG).

Sede Legale: Via dei Termini, 18/A- 24040 Osio Sopra (BG).

Capitale Sociale € 100.000,00 – Registro Imprese Bergamo

R.E.A. BG-380229 – Codice Fiscale e Partita IVA 01617080666

Installation instructions

If required, it is possible to glue the rubber sheets directly to the floor with the specific adhesive.

For instructions on how to use the glue, see the glue data sheet.

For an ideal installation, make sure the underlying floor is smooth, clean, dry and free from imperfections.

